
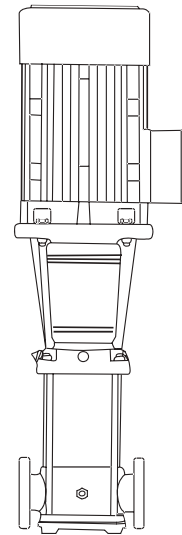
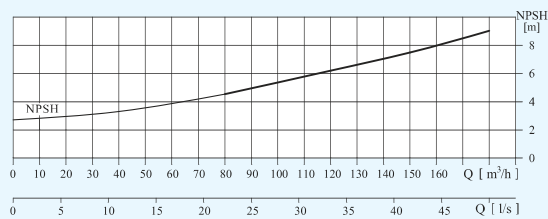
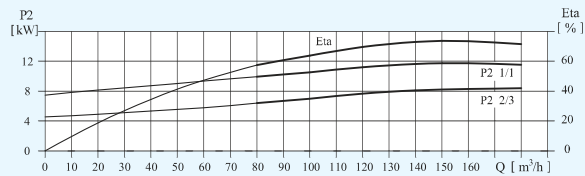


Stainless Steel Vertical Multistage Pump — 60Hz — SVM(T)150


Performance Curves

Model Description

SVM(T)32/45/64/90/120/150

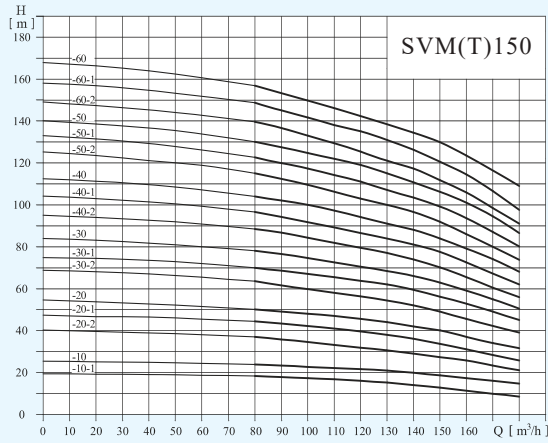

SVM/SMVT

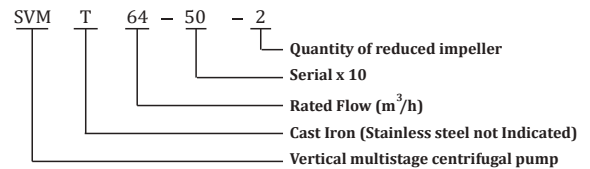


Size and weight


Model	Size (mm)					Weight (kg)
	B1	B2	B1+B2	D1	D2	
SVM150-10-1	840	490	1330	330	255	235
SVM150-10	840	590	1430	360	285	280
SVM150-20-2	1000	660	1660	400	310	360
SVM150-20-1	1000	660	1660	400	310	380
SVM150-20	1000	700	1700	460	340	435
SVM150-30-2	1190	770	1960	510	370	545
SVM150-30-1	1190	845	2035	580	410	665
SVM150-30	1190	845	2035	580	410	665
SVM150-40-2	1350	845	2195	580	410	680

Stainless Steel Vertical Multistage Pump — 60Hz — SVM(T)150

Structure chart:SVM(T)120/150/200 Material:SVM(T)120/150/200

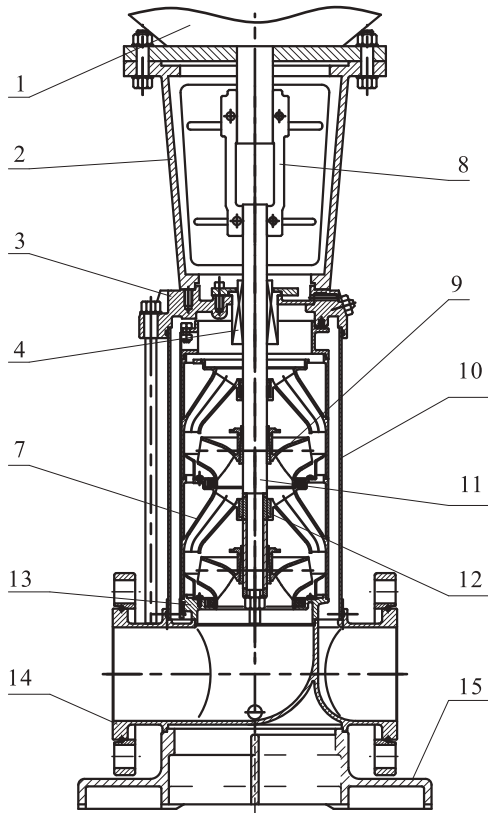

SVM

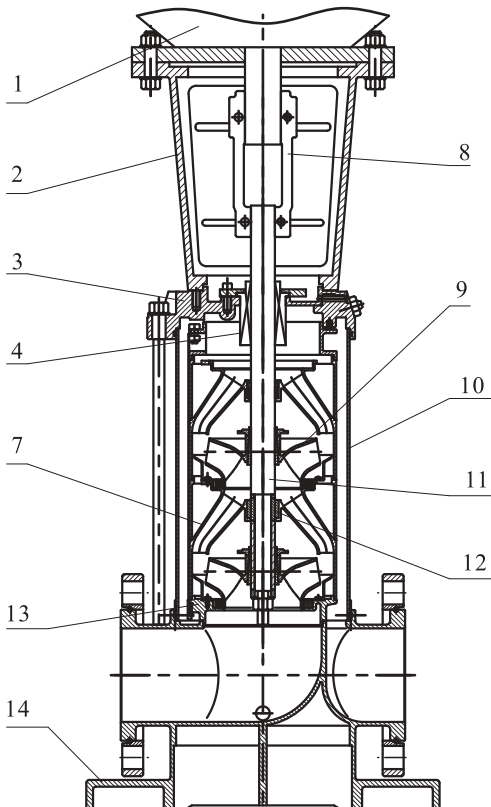

No	Description	Material	AISI/ASTM
1	Motor	Assembling unit	
2	Frame	Cast Iron/Ductile iron	ASTM25B ASTM70-50-05
4	Seal	Assembling unit	
7	Support guide vane	Stainless Steel	AISI304
8	Coupling	Ductile iron	ASTM7-50-05
9	Impeller	Stainless Steel	AISI304
10	Shell	Stainless Steel	AISI304
11	Pump Shaft	Stainless Steel	AISI304 AISI316L AISI431
12	Bearing	Tungsten Carbide	
13	Inlet guide vane	Stainless Steel	AISI304
SVM			
3	seal seat	Stainless Steel	AISI304
14	Inlet & outlet seat	Stainless Steel	AISI304
15	Seat	Ductile iron	ASTM70-50-05
SVMT			
3	seal seat	Ductile iron	ASTM70-50-05
14	Inlet & outlet seat	Cast Iron/Ductile iron	ASTM25B ASTM7-50-05